

# TVIP-IntercomV

**Intercom System for an IP Camera. Available for indoor and outdoor applications.**

- CAT5 connections to intercom panel
- Includes 3.5 mm leads for audio in and out of camera.
- Optional outdoor housing -(O)
- Includes call button
- Power: PoE with pass-through to camera
- Dimensions: L 6.5" x W 4.6" H 3.1"
- On-board voltage regulator and RFI filtering.



Shown with optional outdoor enclosure

## Specifications


### Microphone

- Omni-directional 25' pickup pattern
- .5" thick microphone wind screen.
- Low noise MOSFET pre- amplifier.
- Adjustable gain.
- 200Hz-16Khz Frequency response.
- Line level unbalanced output.
- Limiter selectable on/off.
- Treble boost selectable on/off.

### Speaker

- 2.25" speaker.
- Line level (0dbm) or 70v line selectable signal input.
- Adjustable volume.
- 500Hz-5Khz frequency response
- 2 Watts RMS power amplifier.

## System Diagram

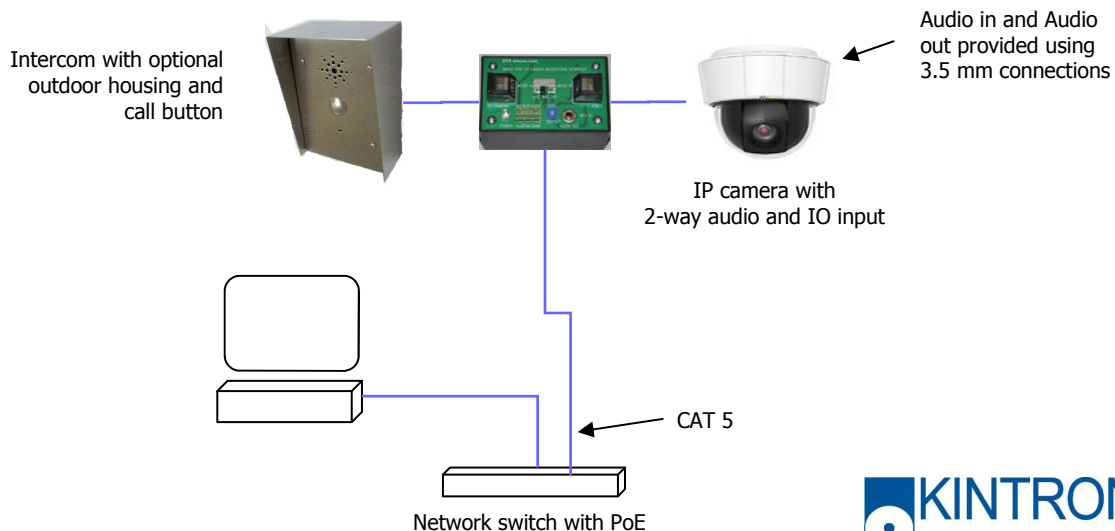

**KINTRONICS**  
Information Technology  
[www.kintronics.com](http://www.kintronics.com)