


Intercam70

Indoor Intercom with Video

- Indoor intercom with two-way audio and video
- Communicates to computer or smartphone
- Can open the door from the App on the smartphone
- Door status and electric lock control
- Bell notification
- Multiple intercoms controlled by software on Windows PC



Intercam70

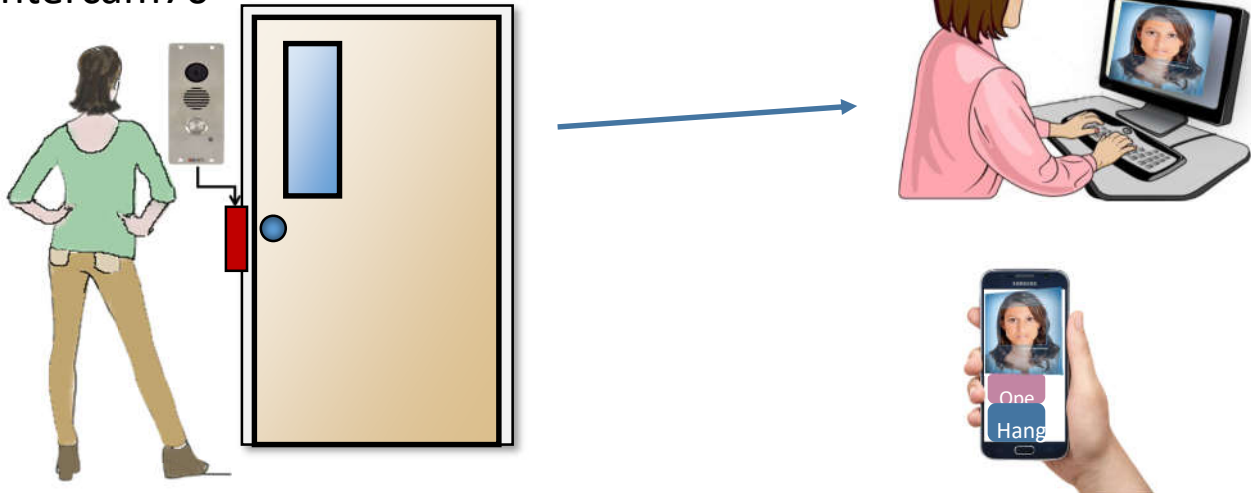

Call us at 1-800-431-1658 in the USA or 914-944-3425 outside the USA. Fax: 914-944-0717

www.kintronics.com



Intercam70

Device

Maximum Resolution	2MP
Application	Indoor Intercom
Effective Pixels	1984(H) X 1105(V) (2.19 MP)
Day / Night	No
Low Light Sensitivity	Superior
IR Sensitivity Range	NA
IR LED	NA
Mechanical IR Cut Filter	No
Product Type	Intercom

Lens

Focal Length	Fixed focal, f3.6mm
Horizontal Viewing Angle	87.5°
Vertical Viewing Angle	48.1°

Video

Compression	H.264 (Baseline/ Main/ High profile), MJPEG
Wide Dynamic Range	Basic WDR (75 dB)
Image Enhancement	White Balance, Brightness, Contrast, Sharpness, Automatic gain control, Flickerless
Digital Noise Reduction	DNR
Privacy Mask	4 configurable regions
Text Overlay	Yes
On-Screen Graphics	Yes
Image Orientation	Flip, Mirror

Audio

Audio Type	2-way, Built-in Microphone, Mic-in, Line-in, Built-in Speaker
Audio Compression	8 kHz, 16 bit encoding, Mono, G.711

Network**Intercam70**

Ethernet Port	1 x RJ-45 connector
---------------	---------------------

Event


Built-in Analytics	
Event Trigger	Touch button, External device through digital input, Sound detection
Event Response	Notify control center, Change camera settings, Command other devices, E-mail notification with snapshots, Play the audio file, Push notification to mobile device, Save video to local storage, Upload video to NVR server, Upload video or snapshot to FTP server, Activate external device through digital output

Interface

Serial Port	1 x RS-485
Local Storage	MicroSDHC, MicroSDXC Memory Card Slot (card not included, up to 256GB)
Digital Input/Output	2/2

General**Intercam70**

Power Source	DC 12V, PoE Class 3 (IEEE802.3af)
Power Consumption	12.95 W (PoE)
Weight	728g (1.605lb)
Dimensions	(W x H x D): 82mm x 212mm x 47.2mm (3.2" x 8.3" x 1.9")
Environmental Casing	Weatherproof front plate only (IP66), Vandal proof metal casing (IK10)
Mount Type	Wall Mount, Gang Box
Starting Temperature	-40°C ~ 55°C (-40°F ~ 131°F)
Operating Temperature	-40°C ~ 55°C (-40°F ~ 131°F)
Approvals	CE, FCC, IP66 (front plate only), IK10 (metal casing)
Warranty	3 Year(s)

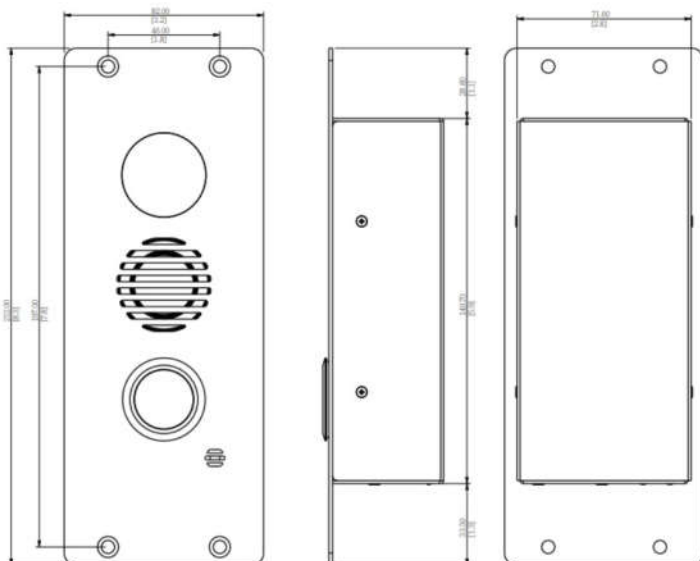

1-800-431-1658 in the USA or
914-944-3425 outside the USA.

Fax: 914-944-0717

www.kintronics.com

KINTRONICS
IP Security Solutions